



O-HD PRO / SERIES
Small Pixel Pitch
Led Display

Distributeur Suisse



STREAMING-LIVE.ME


Bienvenue dans le monde du numérique

Nicolas OBERSON
nico@streaming-live.me
Rte du Péleret 10 D: +41 79 366 81 27
CH - 1691 Villarimboud



One Display Limited

www.onedisplaygroup.com

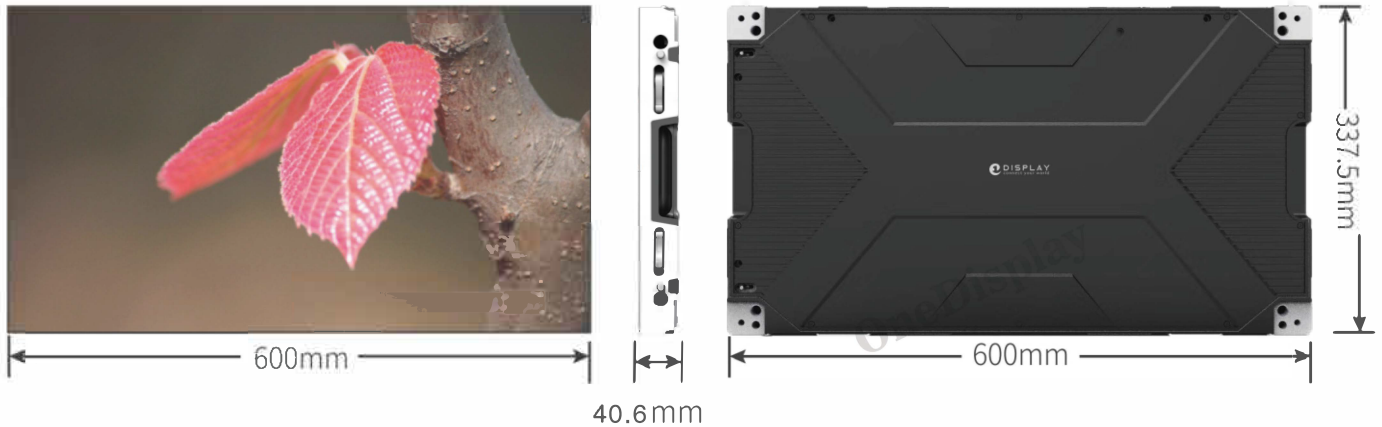

Parameters


SPECIFICATION

Pixel Pitch	0.93mm	1.25mm	1.56mm	1.87mm
Encapsulation brand	NationStar			
LED lamp bead model	Mini	SMD1010	SMD1010	SMD1515
Pixel composition	4R4G4B	1R1G1B	1R1G1B	1R1G1B
Module Resolution(W*H)	160*180	120*135	96*108	160*90
Module Size(W*H)	300×168.75mm	300×168.75mm	300×168.75mm	300×168.75mm
Module Fixed Way	Front Access (Magnetic)			
Panel Resolution(W*H)	640*360	480*270	384*216	320*180
Panel Size(W*H*D)	600mm×337.5mm×40.6mm			
Module Arrangement(W*H)	2*2	2*2	2*2	2*2
Panel Weight (kg/panel)	6.5kg			
Panel Material	Die-casting aluminum frame			
Flatness between modules	≤0.1mm			
Maintenance Way	Front & Rear			
Density of Pixel (dots/m2)	1137777	640000	409600	284444
Brightness(cd/m2)	500			
Viewing angle	140°/140°			
Flatness	≥98%			
Contrast	6000:1			
Protection level	Ip30			
Gray scale	14bit			
Chromaticity uniformity	±0.003 within Cx,Cy			
Driving method	1/64dynamic	1/45dynamic	1/54dynamic	1/45dynamic
Frame change frequency	60			
Refresh rate	3840			
Color temperature	2000K~9500K			
Operating platform	Windows XP /7/8/10			
Signal Input	HDMI、DVI			
Operating Voltage	AC: 110V~240V、50~60Hz			
Maximum Power (W/m2)	800			
Average power (W/m2)	200			
Continuous working time	≥7×24hrs			
Service life	100000Hours			
Operating environment	-10℃~60℃ 10%~90%RH			



Slim and light weight

A single cabinet weighs only 6.5kg and is only 40.6mm thick, greatly reducing the load on the wall and can be mounted directly on the wall.

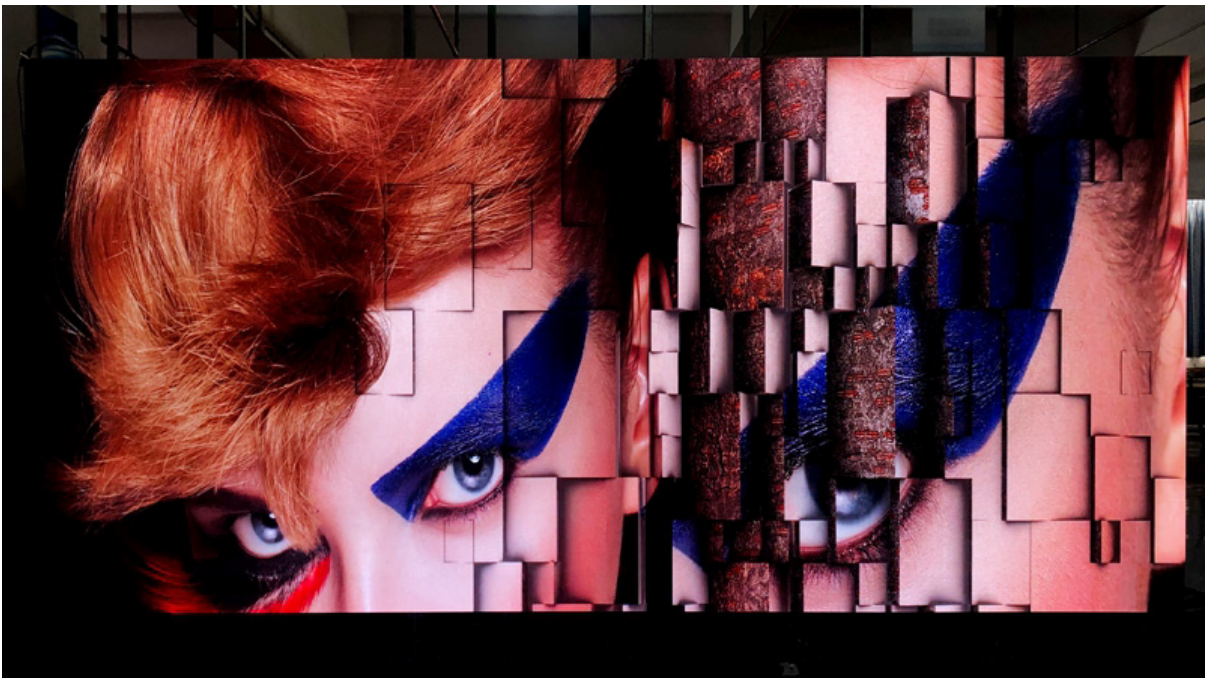

Front access, effortless service

All cabinet components accessible from the front with the magnetic tool supplied to ensure efficient maintenance.




Perfect 16:9 Led Display

The 4K LED display is composed of many 16:9 LED cabinet 600×337.5mm; the resolution can reach 3840×2160, without any stitching and gaps, the most significant feature that distinguishes it from 4K LCD screen is that it can be large size. The colors are more natural, to bring the real content to life.



Perfect visual performance

3840mm refresh, full series of standard MBI 5153 IC, 140° angel of non-dead-angle viewing experience, 6000:1 high contrast ratio, 65536 grayscale rating, perfect to present the high-end small pitch standard.

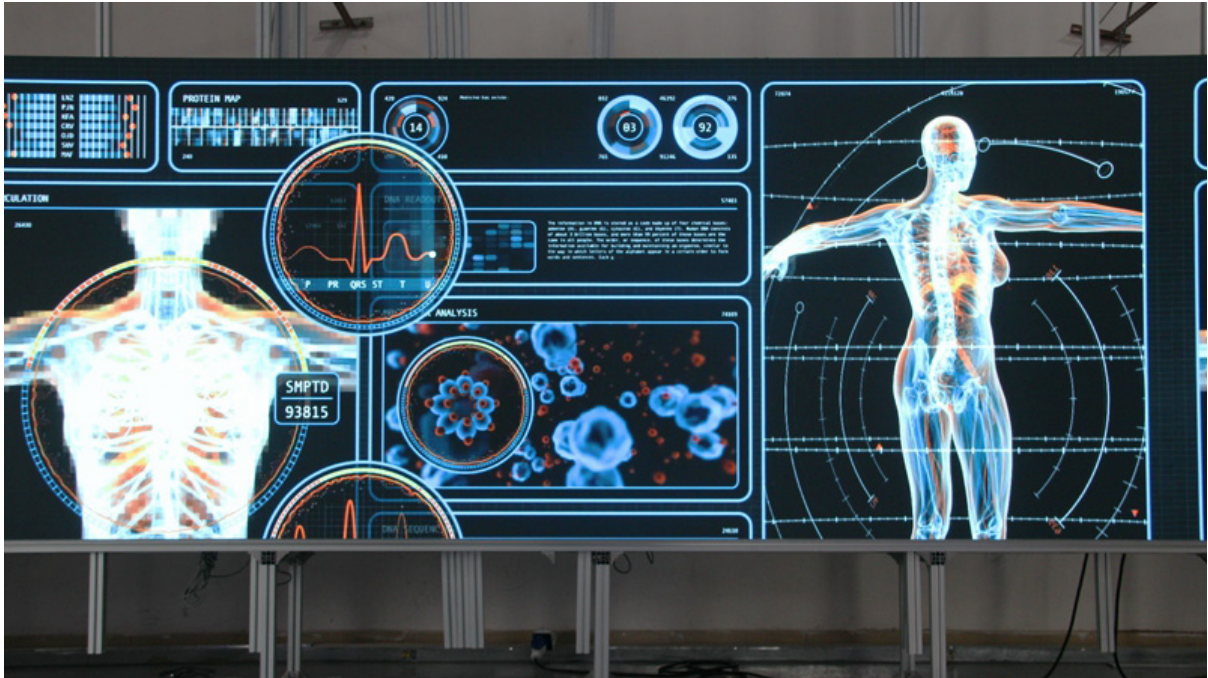

Whisper-quiet operation

Fanless design, energy efficient IC and low heat conduction delivers a super-silent LED display.



Led Screen For Conference Room

Optional upgrade dual power signal backup system High system stability, 100,000 hours trouble-free operation.



Led Screen For Control Room



Led Screen For TV station

O-HD PRO
SERIRS

Distributeur Suisse



Nicolas OBERSON

nico@streaming-live.me

Rte du Péleret 10 D: +41 79 366 81 27

CH - 1691 Villarimboud

One Display Limited

Office Number: +86 755-29949922

Phone/Whatsapp: +86 136-32789913

Email: info@onedisplaygroup.com /

marketing@onedisplay.net

Factory Address: No.1 Dayang 2nd Road,
Guangming New District, Shenzhen 518132

CE | EMC | LVD | FC | UL | RoHS